EMEET Meeting Capsule Pro Room Kit

# CONTENTS

Package

x1	x1	x1
x1	x2	x2
User Manual x1	x2	x1

EMEET Meeting Capsule Pro

Component Introduction

- 2 noise-cancelling microphones
- Dual 4K lenses
- 8-microphone array
- Hi-Fi speaker
- USB OUT
- 3.5mm Daisy Chain port (EMEET dedicated Daisy Chain cable required)
- 5 LED indicator lights
- 12V DC power input
- Lock port
- 1/4" tripod screw thread
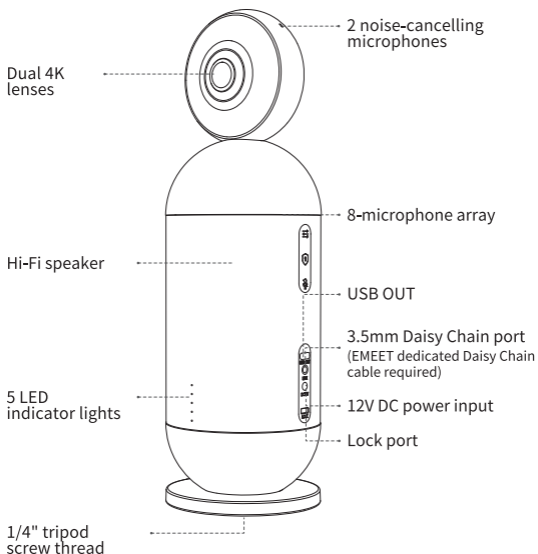
Device Indicator Light

Status	Light
Privacy status/microphone off	5 lights are steady red
Daisy Chain Cable (3.5mm Daisy Chain port)	The middle light is steady ice blue

Button Introduction

- **Sensitivity adjustment button - short press**
  3-level sensitivity to adjust the capture response speed
- **Privacy button - short press**
  Enter/Exit privacy mode immediately
- **Mute button - short press**
  Mircophone mute/unmute
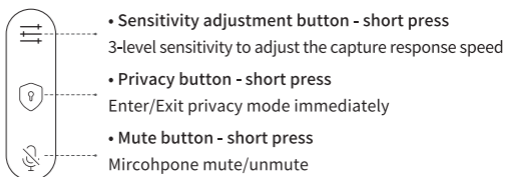
EMEET StreamCam One

Component Introduction

Status indicator light

HD lens

Microphone hole

EMEET

Battery level indicator light

Type-C

1/4" tripod screw thread

Status Indicator Light

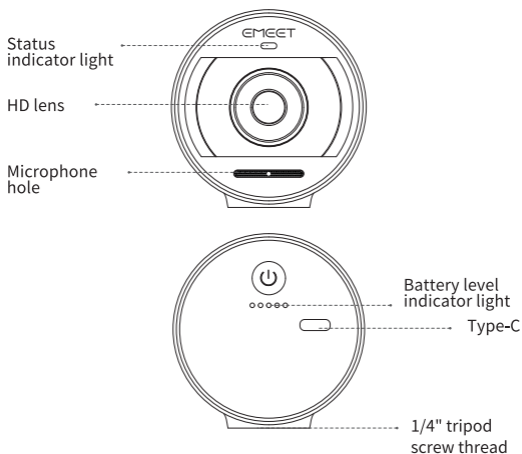| Status	Light
Waiting for connection	Flash green
Wireless Daisy Chain connection successful	Steady green
Transmitting video	Steady red
USB mode	Steady white

Battery Level Indicator Light

| Status	Light
Battery level	The number of steady white lights indicates the current battery level

Button Introduction

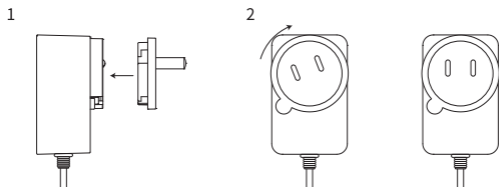- Power button - press and hold
  Power on/off

- Power button - short press
  When wirelessly Daisy Chained, short press
  to turn on/off image transmission

- Reset button - press and hold
  Reset the device

Quick Start Guide

Assemble the Power Adapter

Align the plug slot with the pins on the power adapter;
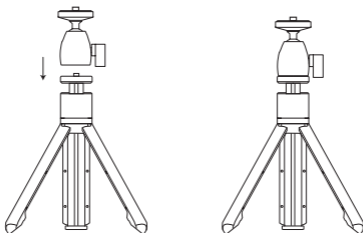Hold and rotate the plug clockwise to lock it.

1

2

To remove the plug, hold the button and rotate counterclockwise
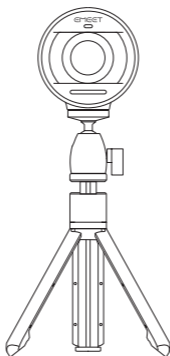to unlock it.

Note: Different areas are paired with different plugs.

Assemble the Tripod

The matching 1/4" threaded tripod and swivel adapter should be
used with the EMEET StreamCam One.

Screw the 1/4" threaded tripod + swivel adapter to the 1/4" threaded hole on the bottom of the EMEET StreamCam One.

(Note: The matching 1/4" threaded tripod is not recommended for use with the EMEET Meeting Capsule Pro as it does not provide enough support for its weight.)

Connection

Fast Connection

1. Connect the EMEET Meeting Capsule Pro to the power adapter, and it will automatically turn on after being plugged in;
2. Connect the computer and the EMEET Meeting Capsule Pro via USB cable (USB OUT);
3. This product is driver-free. For first-time use, please Select the EMEET Meeting Capsule Pro as mic, camera and speaker.
  • macOS: System Preferences > Sound > Sound effects/Output/Input
  • Windows: Right-click on the sound icon > Open Sound Settings > Select Output device/Select Input device
  • Conference software (Zoom, Skype, Teams, etc.): Settings > Audio > Speakers/Microphone; Video > Camera
4. Press and hold the EMEET StreamCam One power button for 2 seconds to turn on the device, and the device will automatically wirelessly connect to the EMEET Meeting Capsule Pro.

Pairing

The EMEET Meeting Capsule Pro Room Kit is already paired by default and can be used directly.

If you have a specific need, you can perform a new pairing for your device. Please follow these steps:

For more detailed instructions, please visit the following URL: https://emeet.com/pages/meeting-capsule-pro-room-kit-faq

EMEETLINK

Software Download: You can download EMEETLINK by visiting www.emeet.com/emeetlink. (Available for Windows and macOS)

Windows	macOS
Download	Download
* For Windows 7/8/10 and above	* For Mac 10.14 and above

For more detailed instructions, please visit the following URL: https://emeet.com/pages/meeting-capsule-pro-room-kit-faq